

V-3WAY TYPE

SIZE: 1/4"~2"



STAINLESS STEEL

AISI-316 (EN10213-4 1.4408) (ASTM-A351-CF8M)

AISI-304 (EN10213-4 1.4308) (ASTM-A351-CF8)

CARBON STEEL




S-20C (EN10213-2 1.0619) (ASTM-A216-WCB)

FEATURES:


- *Anti-static device
- *Blow-out proof stem/Reduced port
- *1000PSI (PN63)
- *L port, T port

- OPTION:** Locking device
ISO 5211 Direct Mounting Pad
ISO 5211 Mounting Pad

ITEM	PARTS	MATERIALS
1	BODY	ASTM-A351-CF8M
2	CAP-B	ASTM-A351-CF8M
3	BALL	ASTM-A351-CF8M
4	SEAT	PTFE
5	STEM	AISI 316
6	GASKET-B	PTFE
7	THRUST WASHER	PTFE
8	PACKING	PTFE
9	GLAND	AISI 304
10	SPRING WASHER	AISI 304
11	STEM NUT	AISI 304
12	LOCKING DEVICE	AISI 304 or AISI 430
13	HANDLE	AISI 304 or AISI 430
14	HANDLE SLEEVE	PLASTIC
15	BOLT	AISI 304
16	STOP PIN	AISI 304
17	GASKET-A	PTFE
18	CAP-A	CF8M

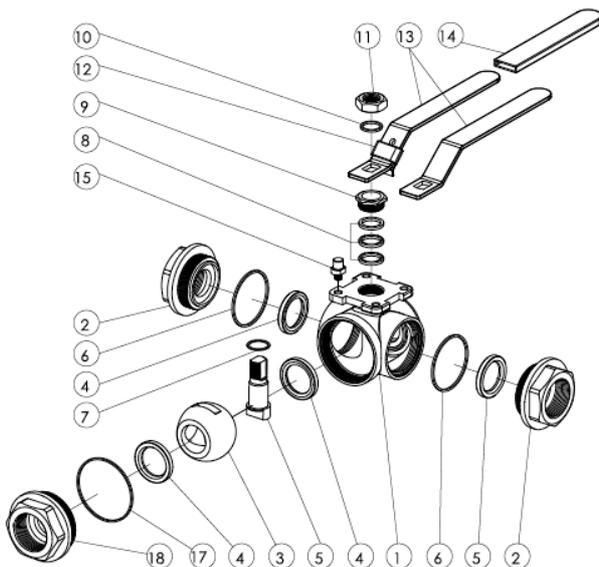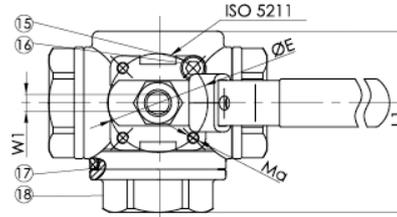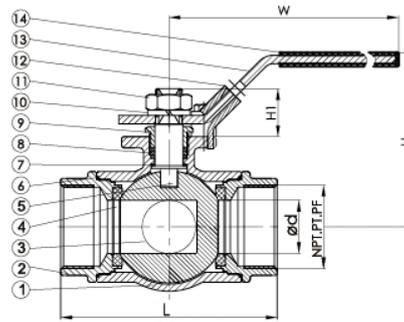

PORT TYPE	1	2	3	4
L	1/3 2	1/3 2	1/3 2	1/3 2
T	1/3 2	1/3 2	1/3 2	1/3 2



DIMENSIONS

UNIT:mm

NOMINAL SIZE	DN	NPS	ød	L	L1	H	W	ISO 5211	øE	H1	W1	Ma
8	1/4"	11.6	76	60.0	67	153	F04	42	18	8	M5	
10	3/8"	12.5	76	60.0	67	153	F04	42	18	8	M5	
15	1/2"	12.5	76	60.0	67	153	F04	42	18	8	M5	
20	3/4"	16.0	86	72.0	77	153	F04	42	20	8	M5	
25	1"	20.0	99	80.2	83	183	F05	50	23	9.5	M6	
32	1 1/4"	25.0	117	94.5	88	183	F05	50	23	9.5	M6	
40	1 1/2"	32.0	124	104	116	246	F07	70	34	12	M8	
50	2"	38.0	148	125	124	246	F07	70	34	12	M8	